

FIGURE 1

(prior art)

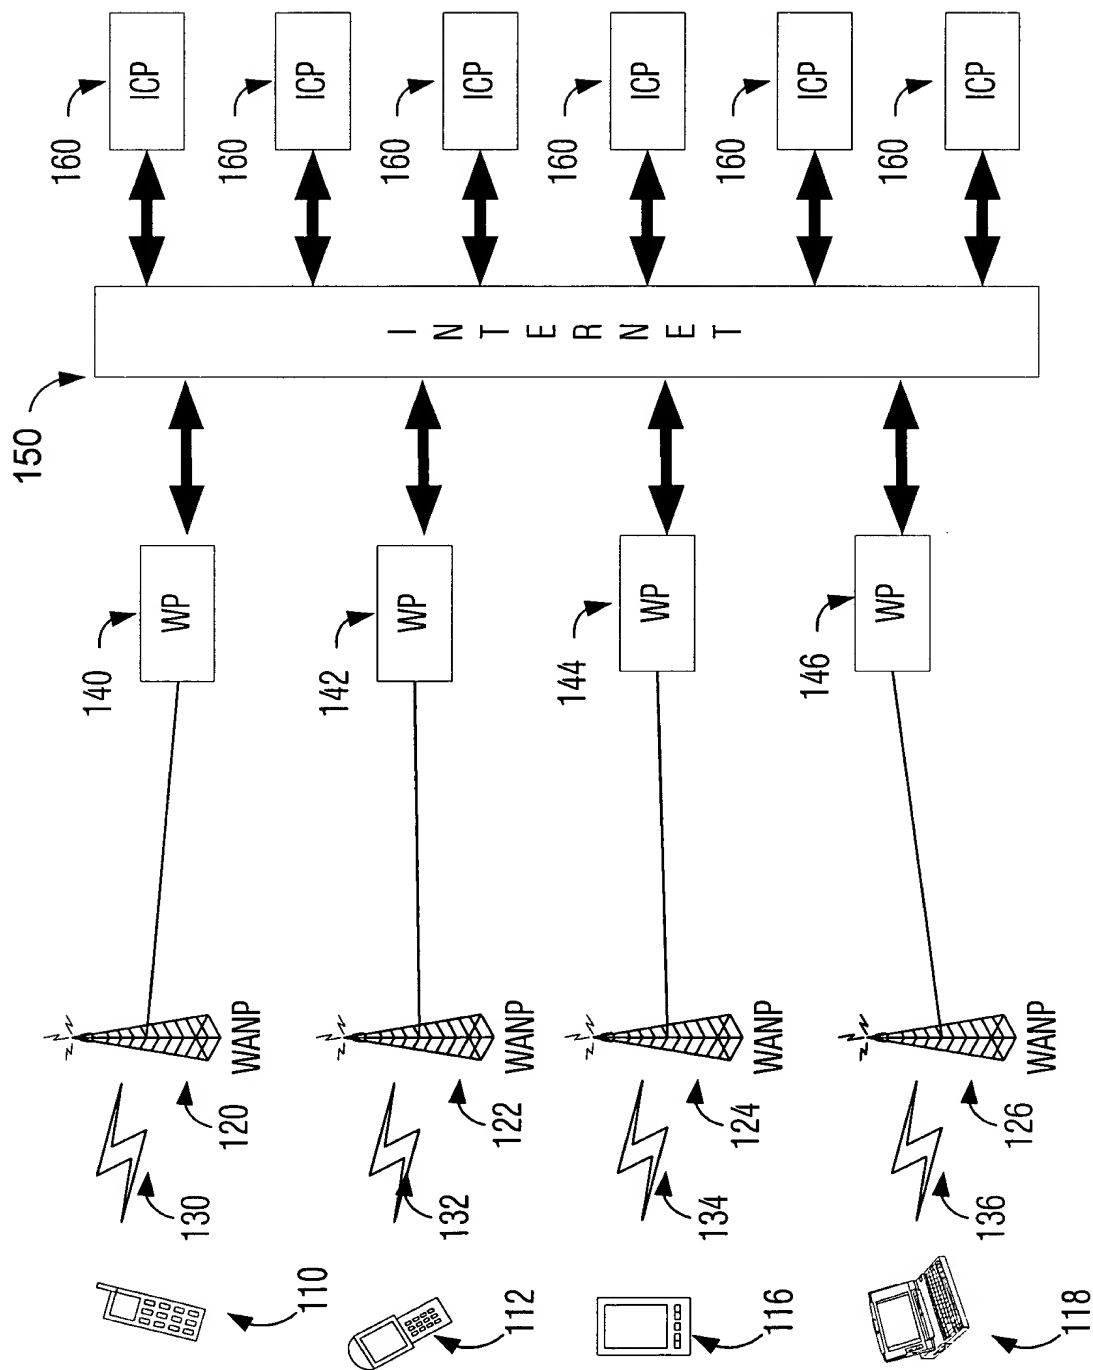


FIGURE 2

200

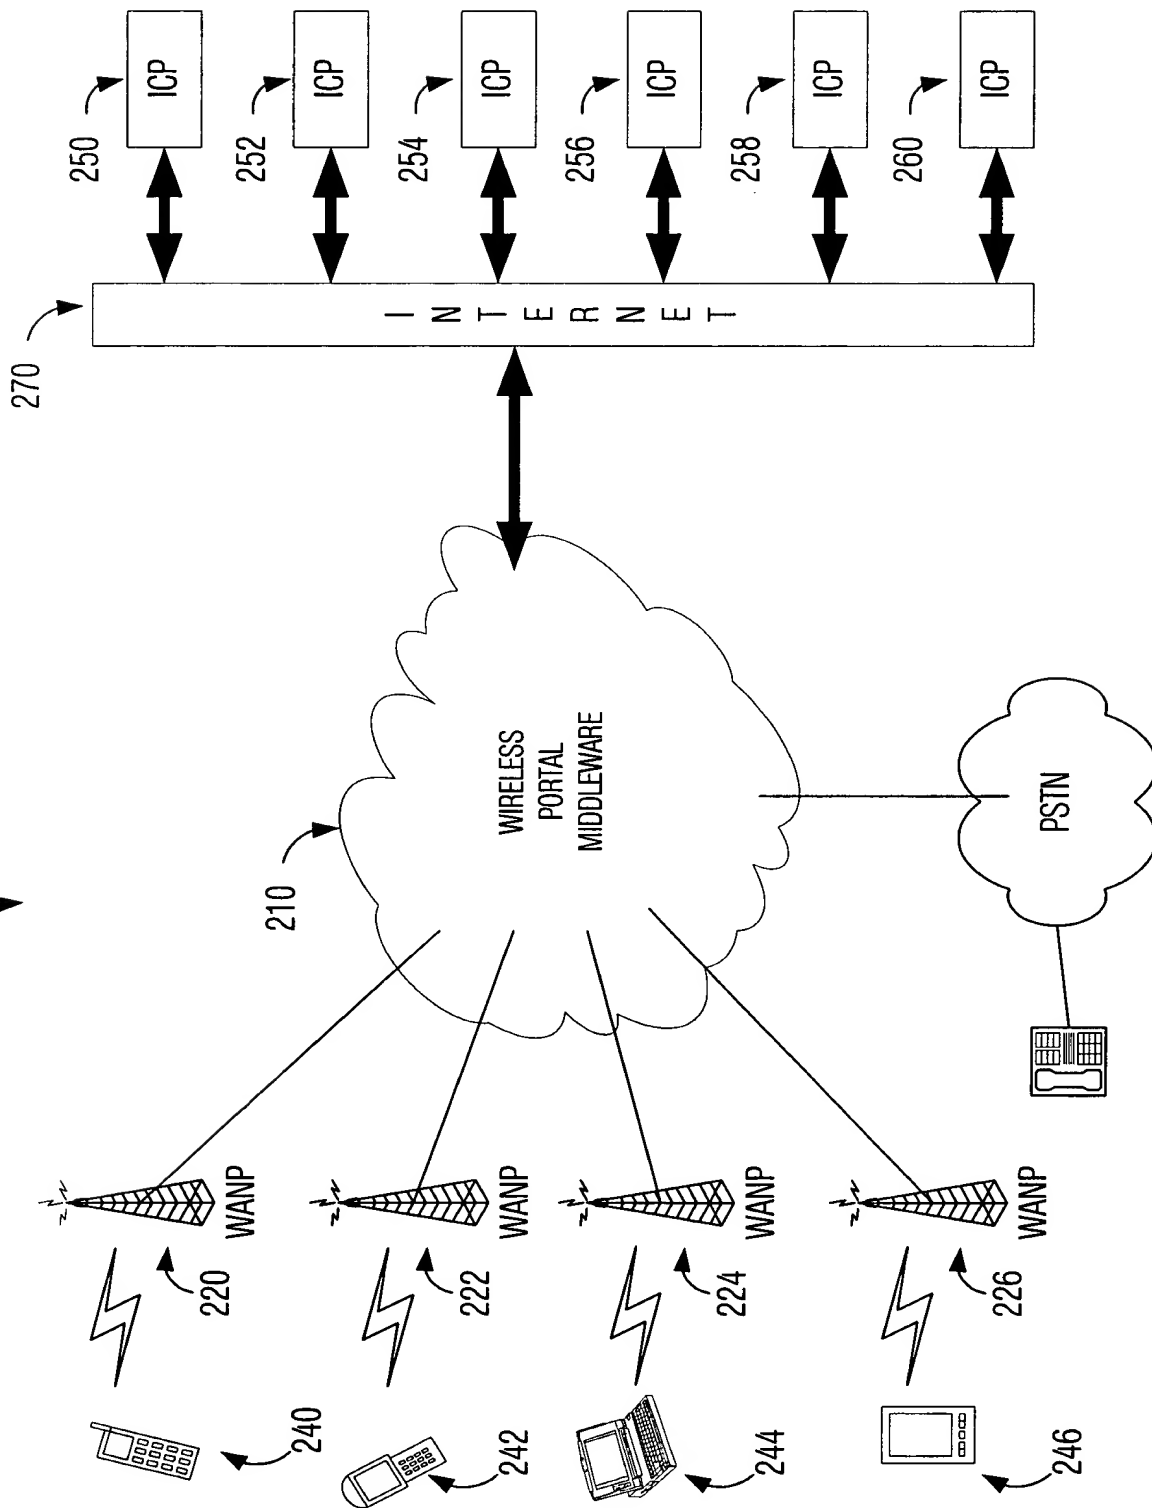


FIGURE 3

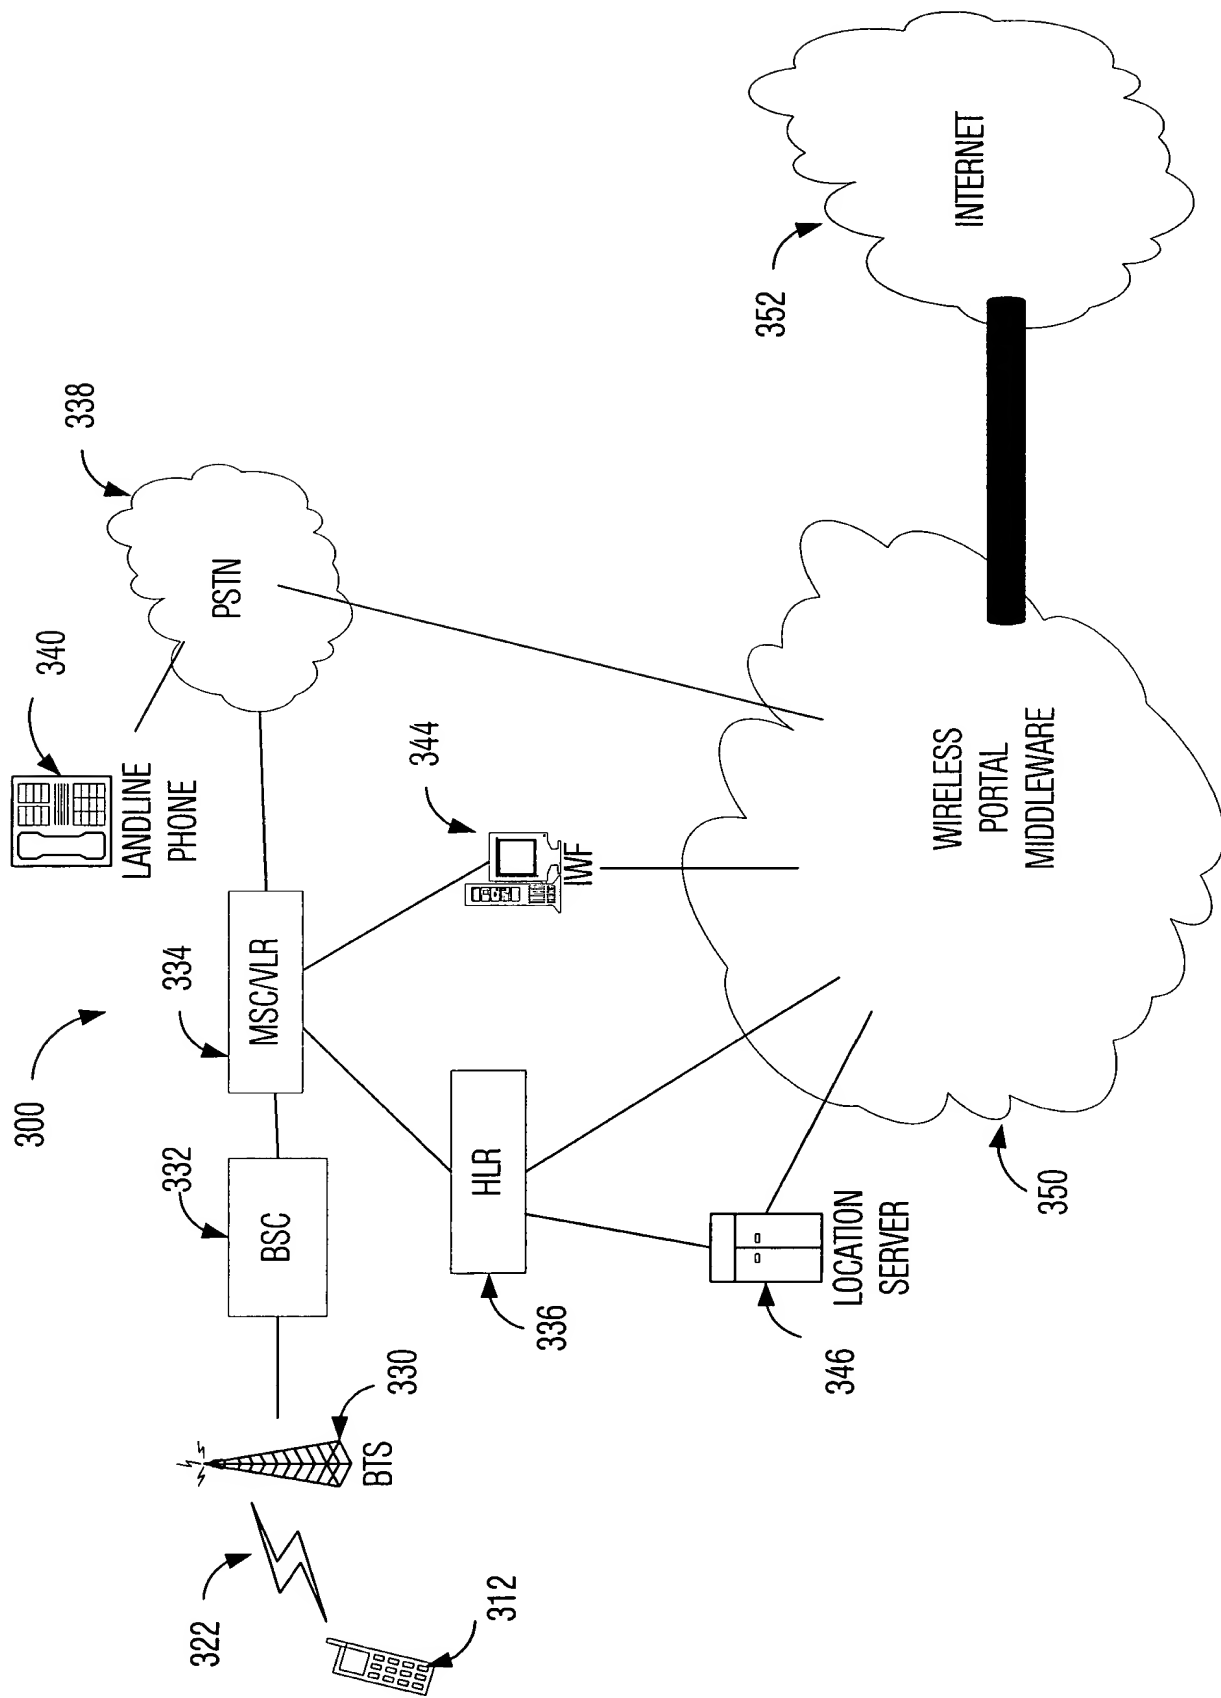


FIGURE 4

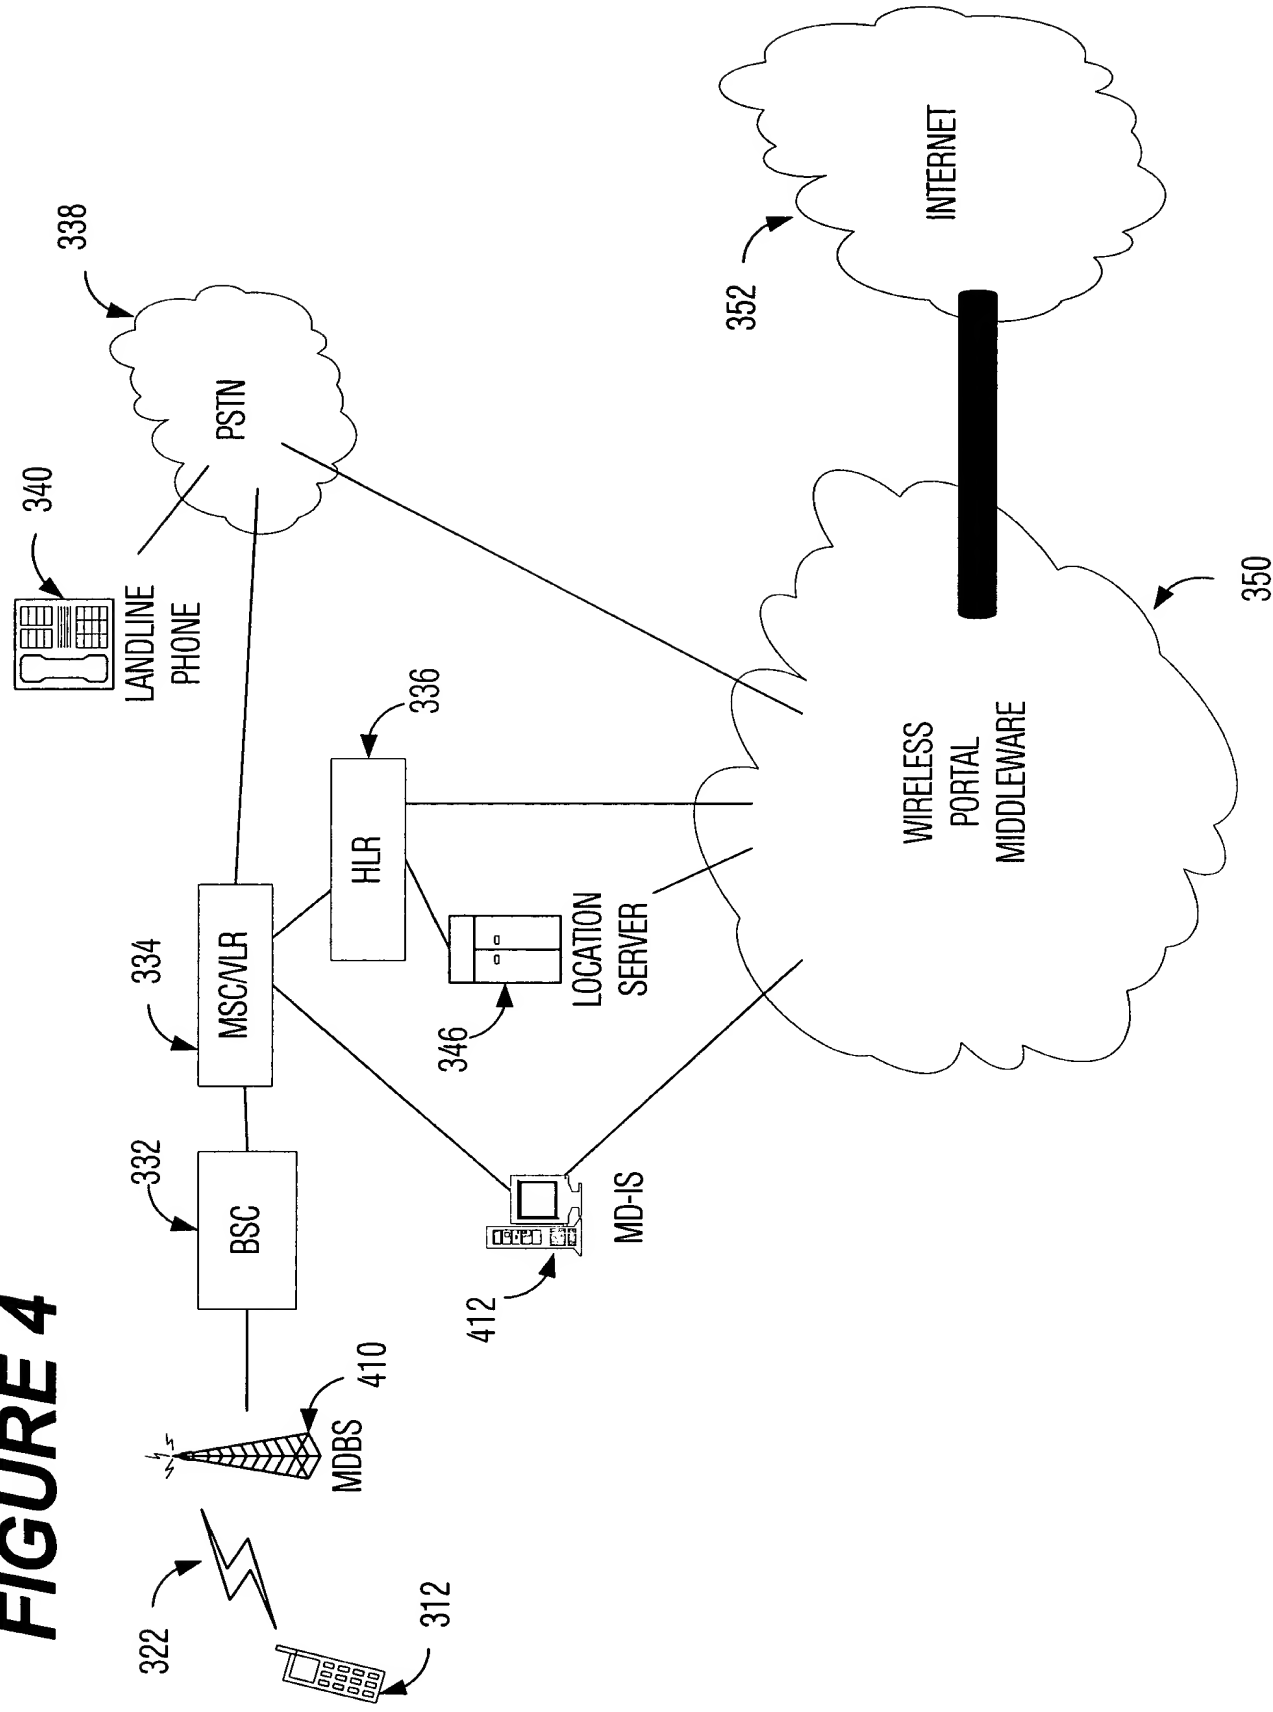


FIGURE 5

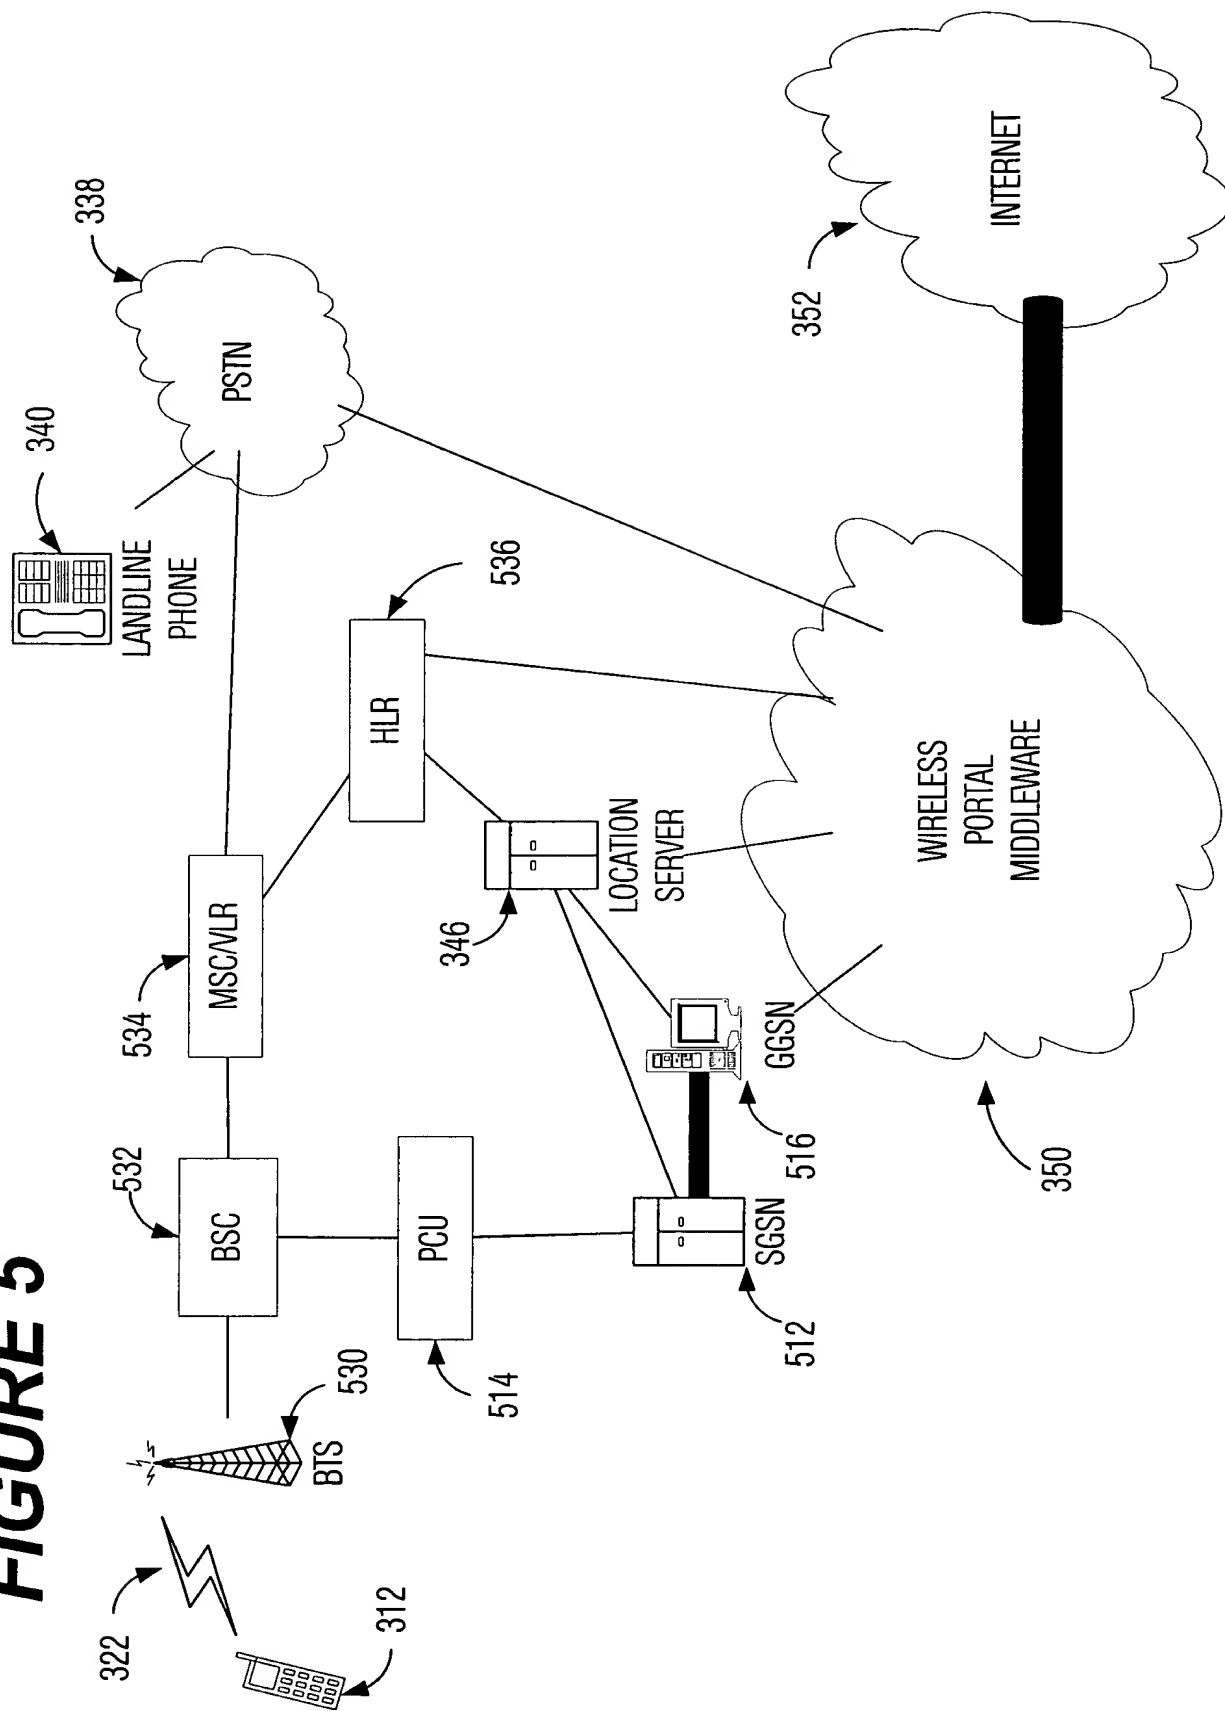


FIG. 6 is a block diagram of a system architecture for a wireless location service.

FIGURE 6

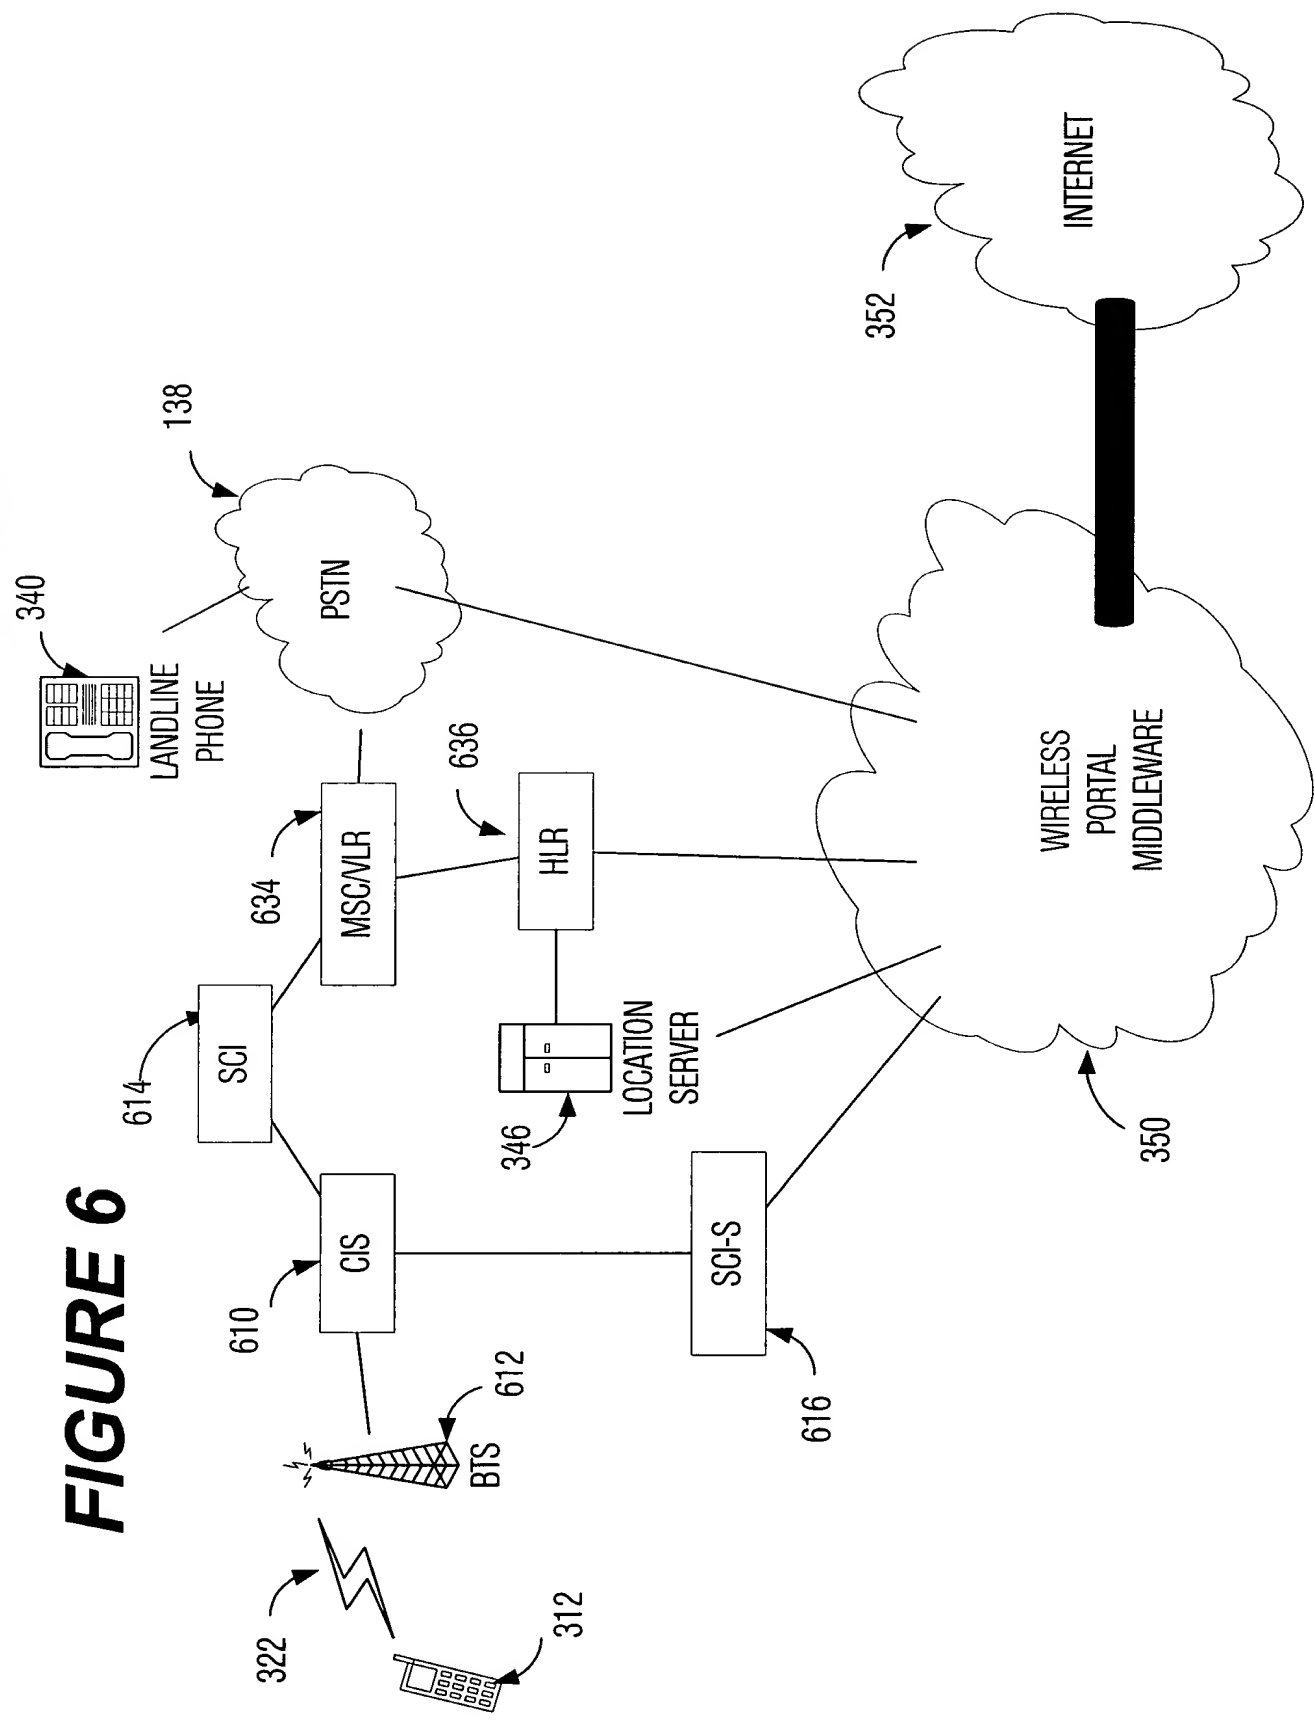


FIGURE 7

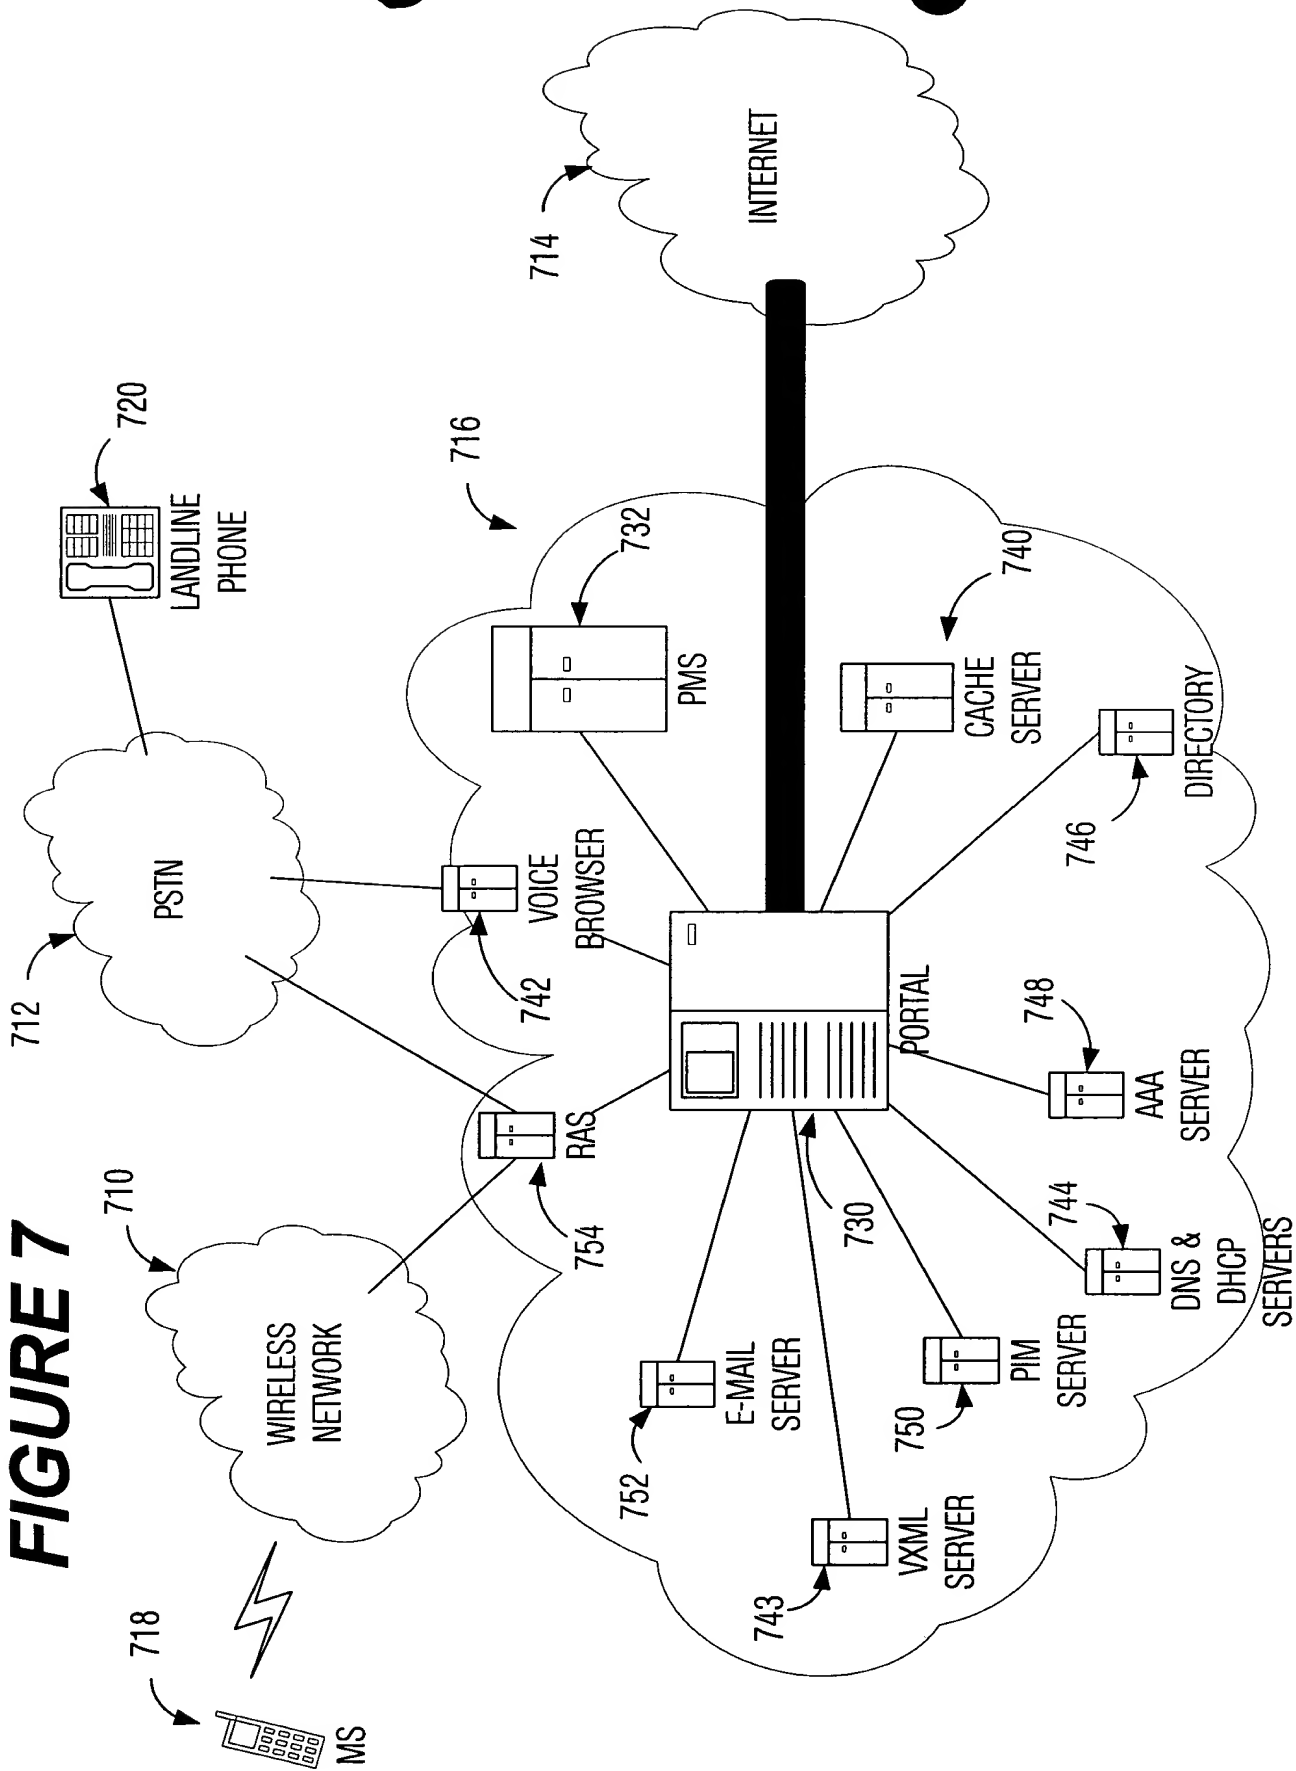


FIGURE 8

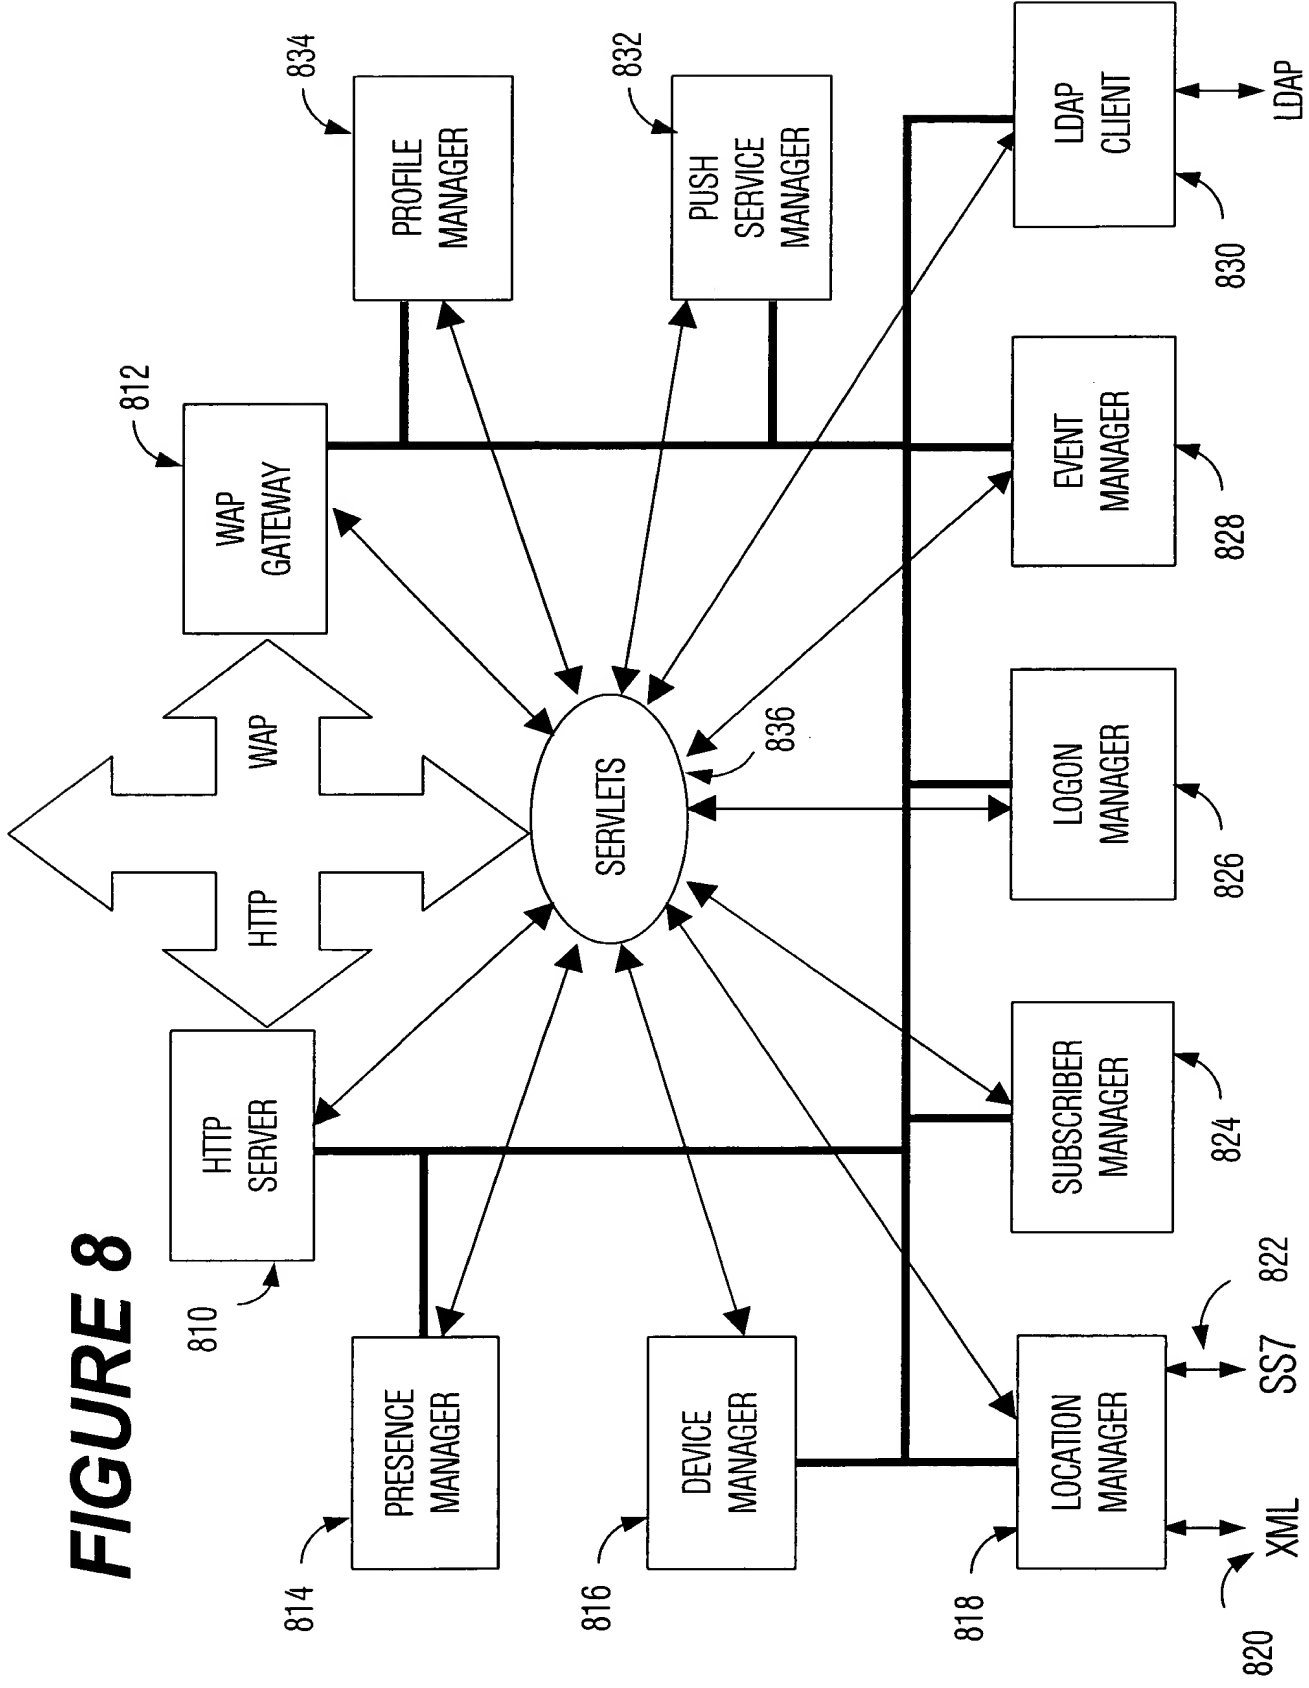


FIGURE 9A

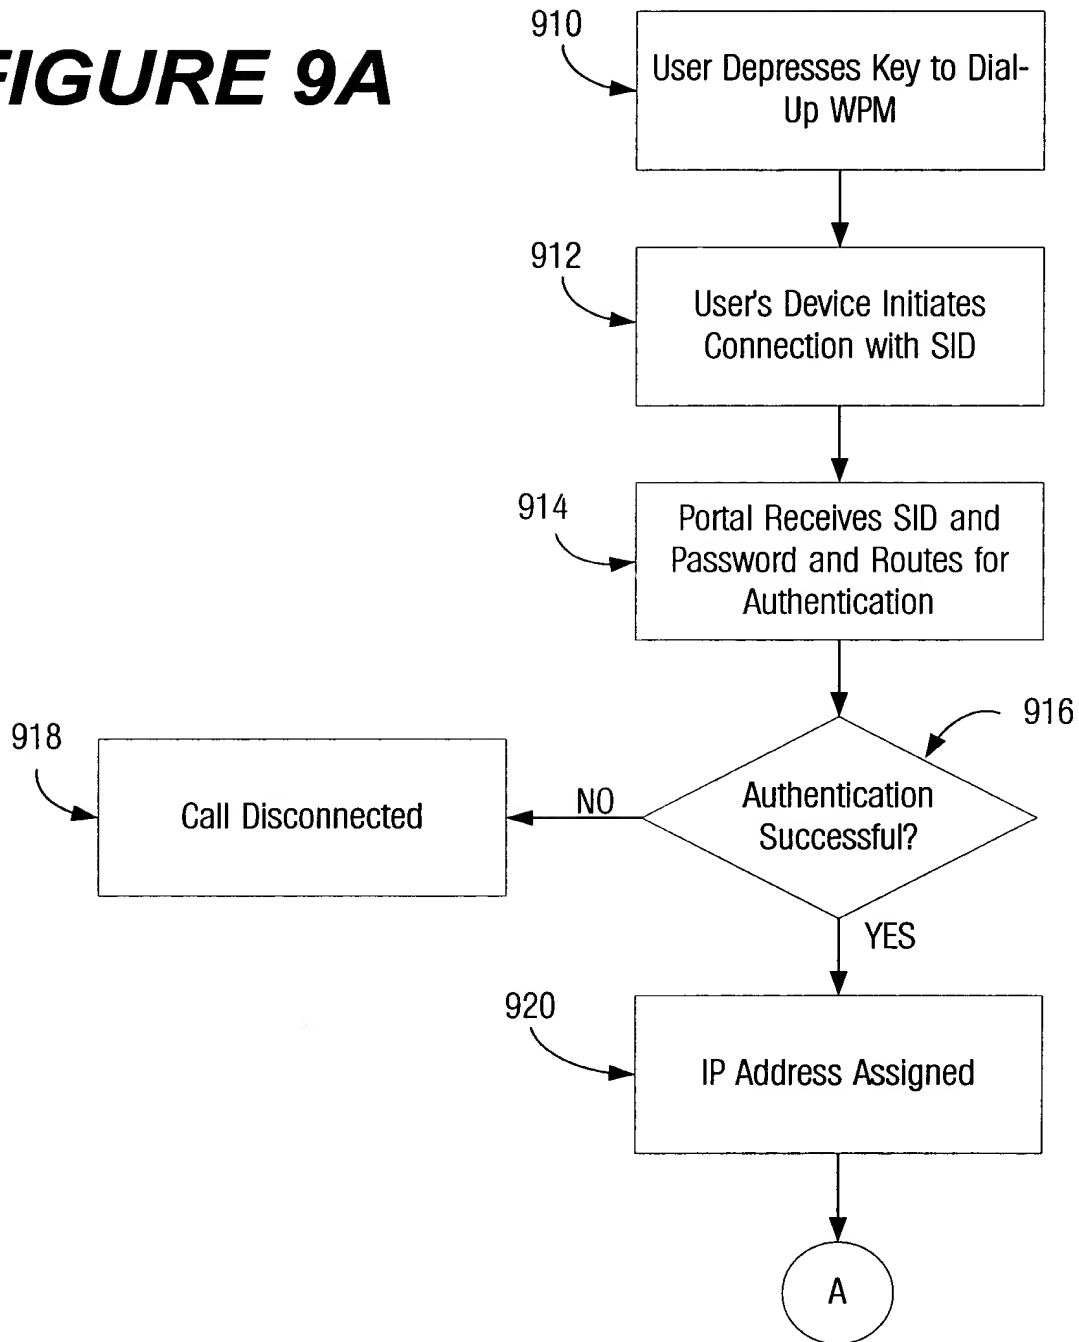


FIGURE 9B

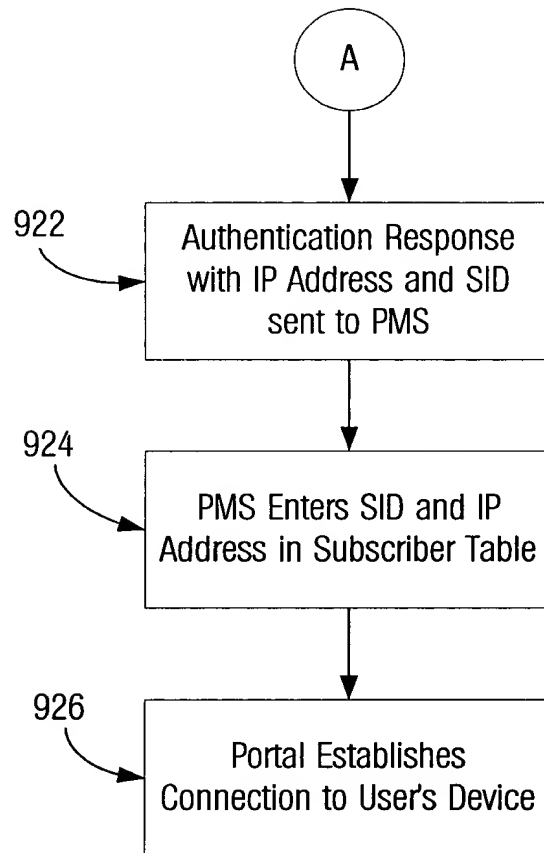


FIGURE 10

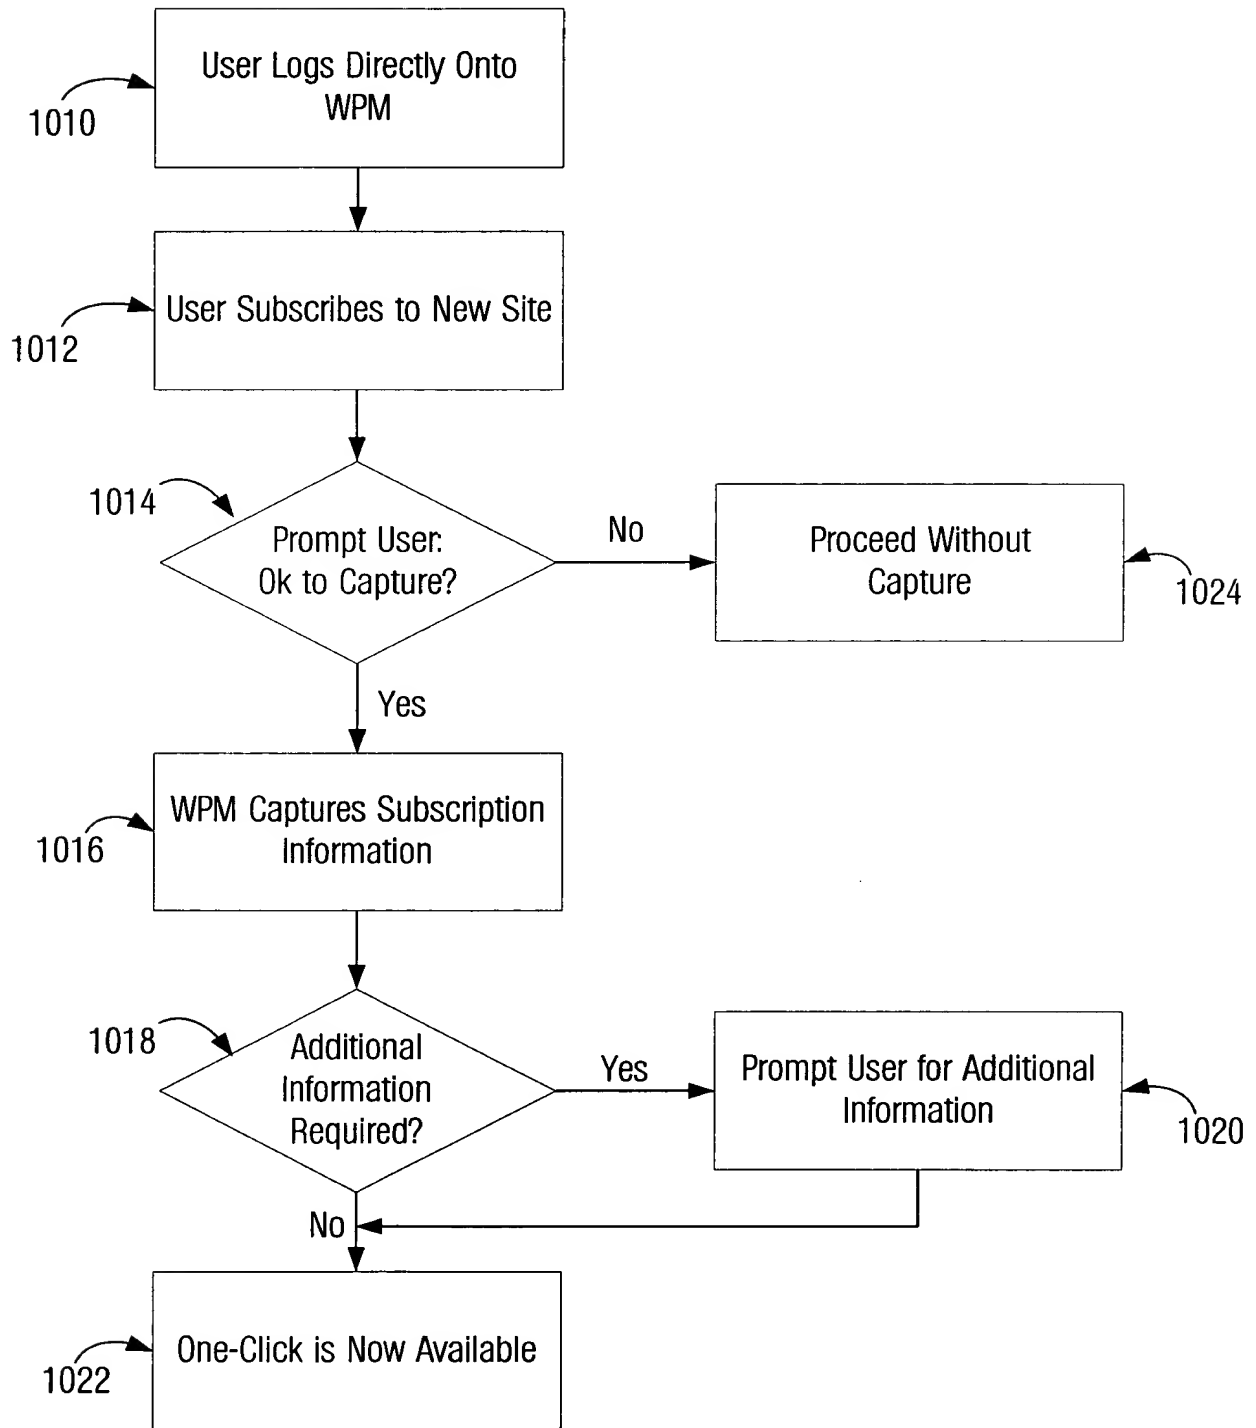


FIGURE 11

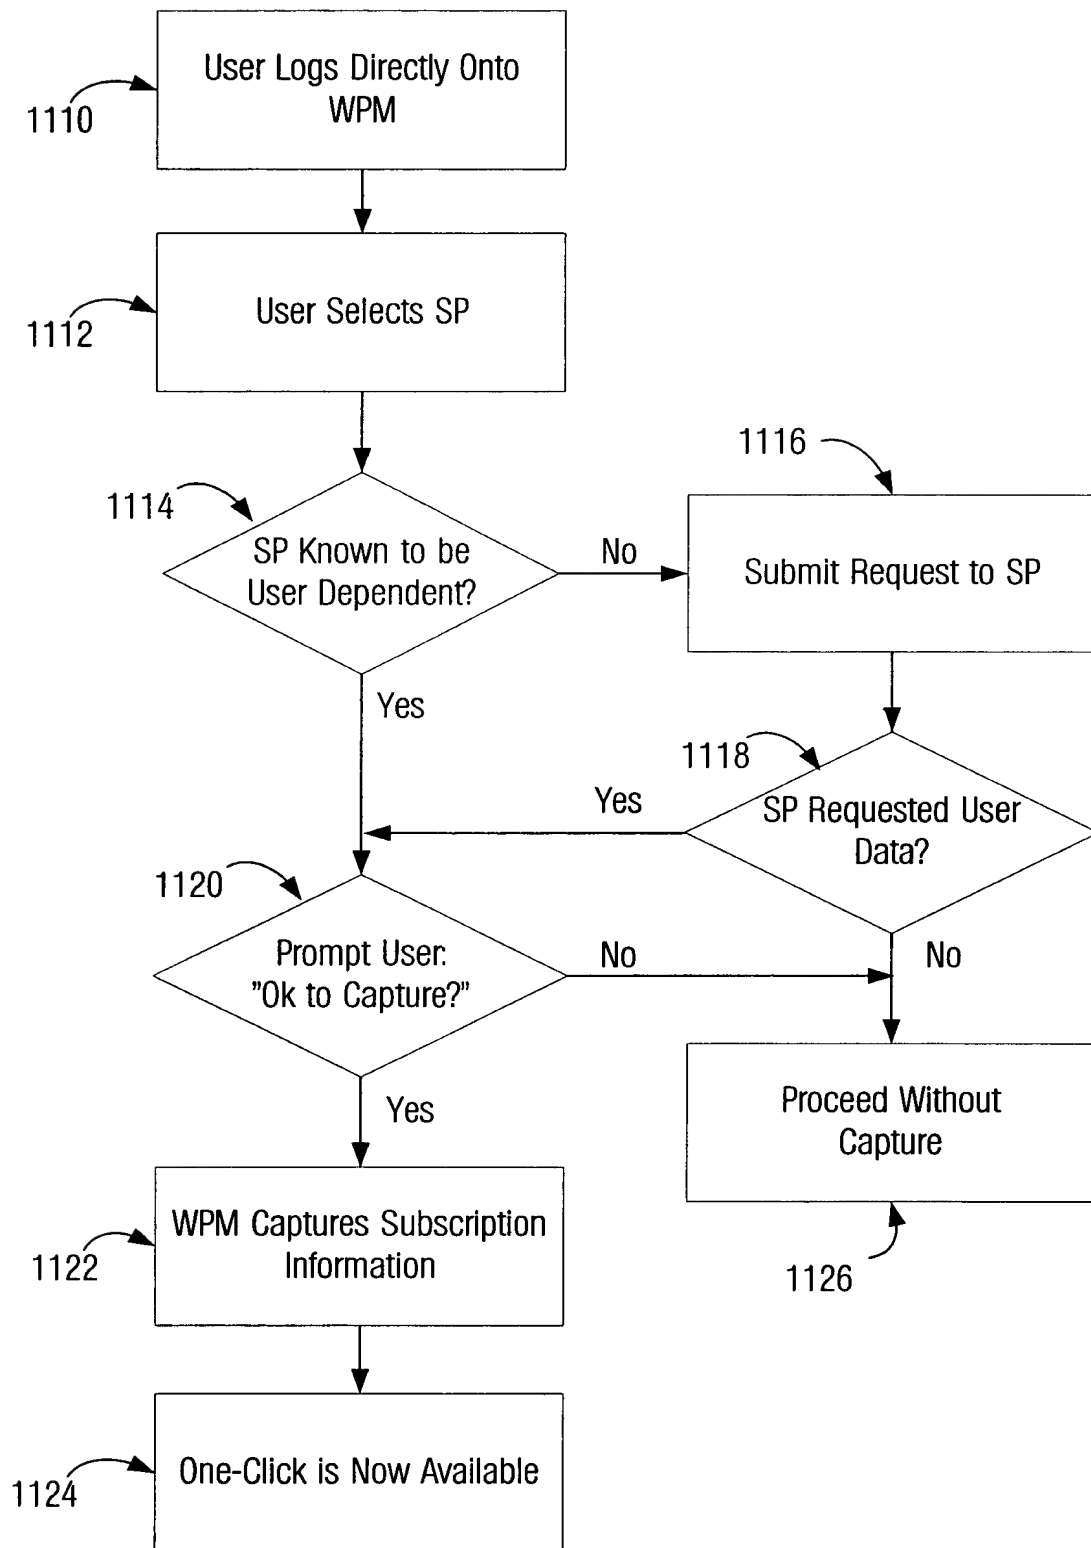


FIGURE 12

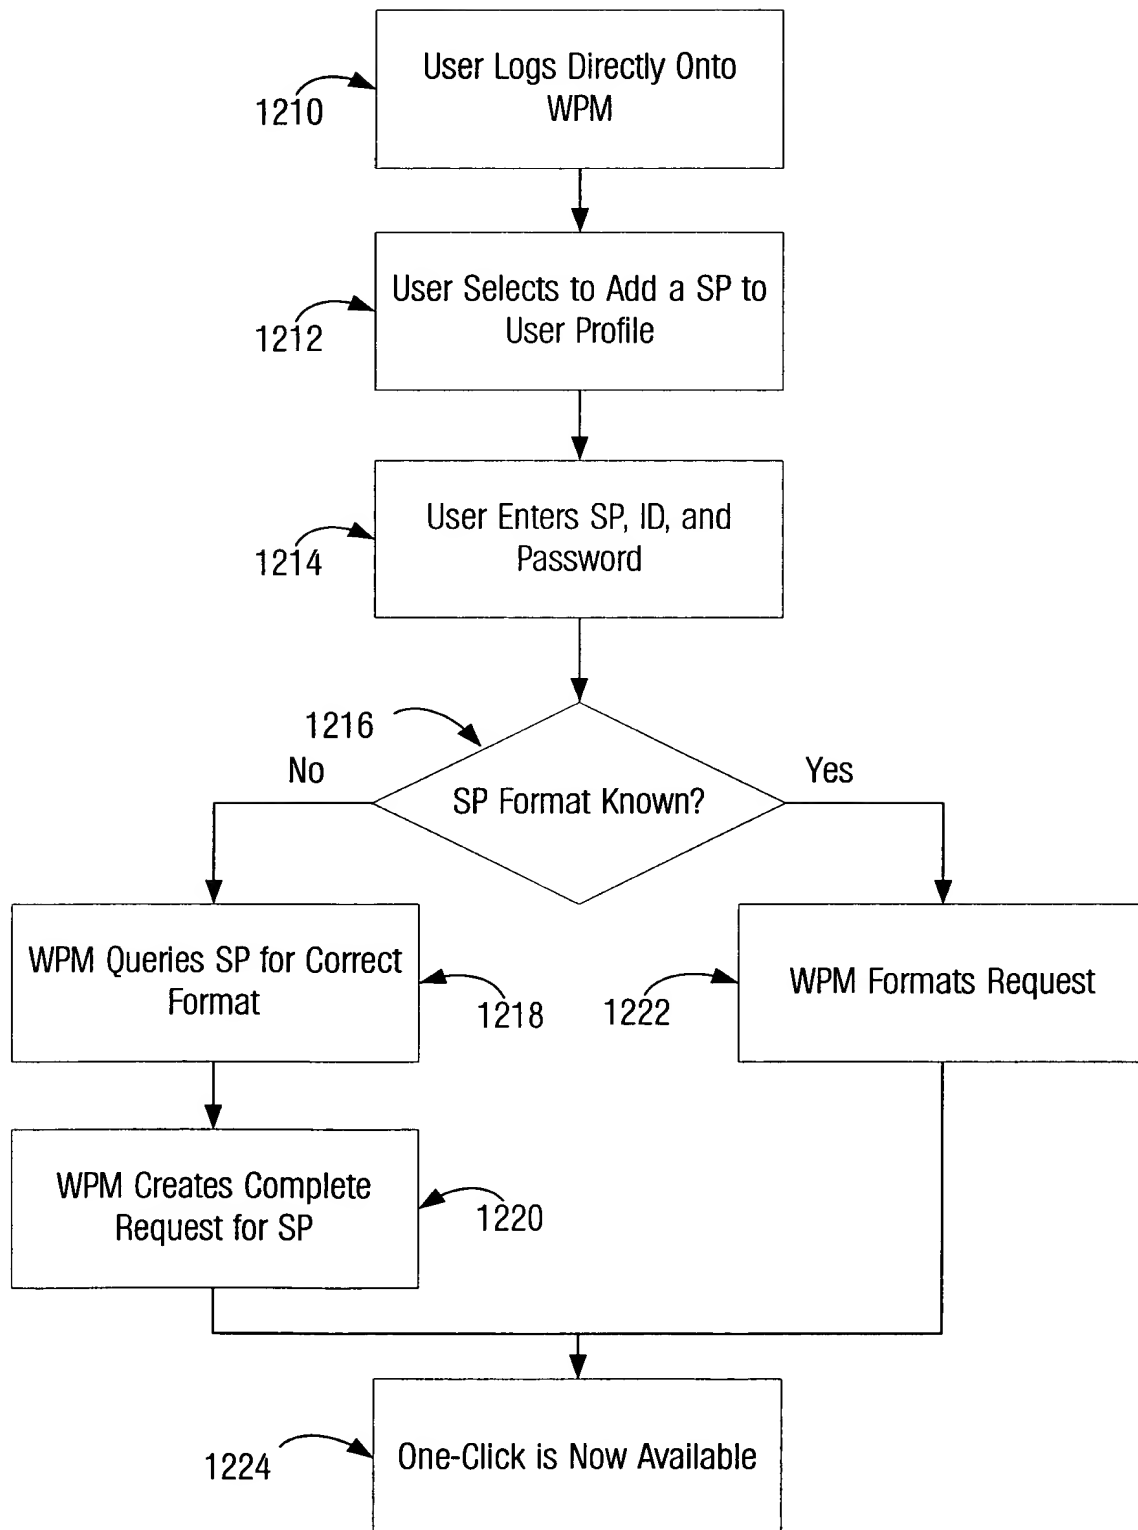


FIGURE 13

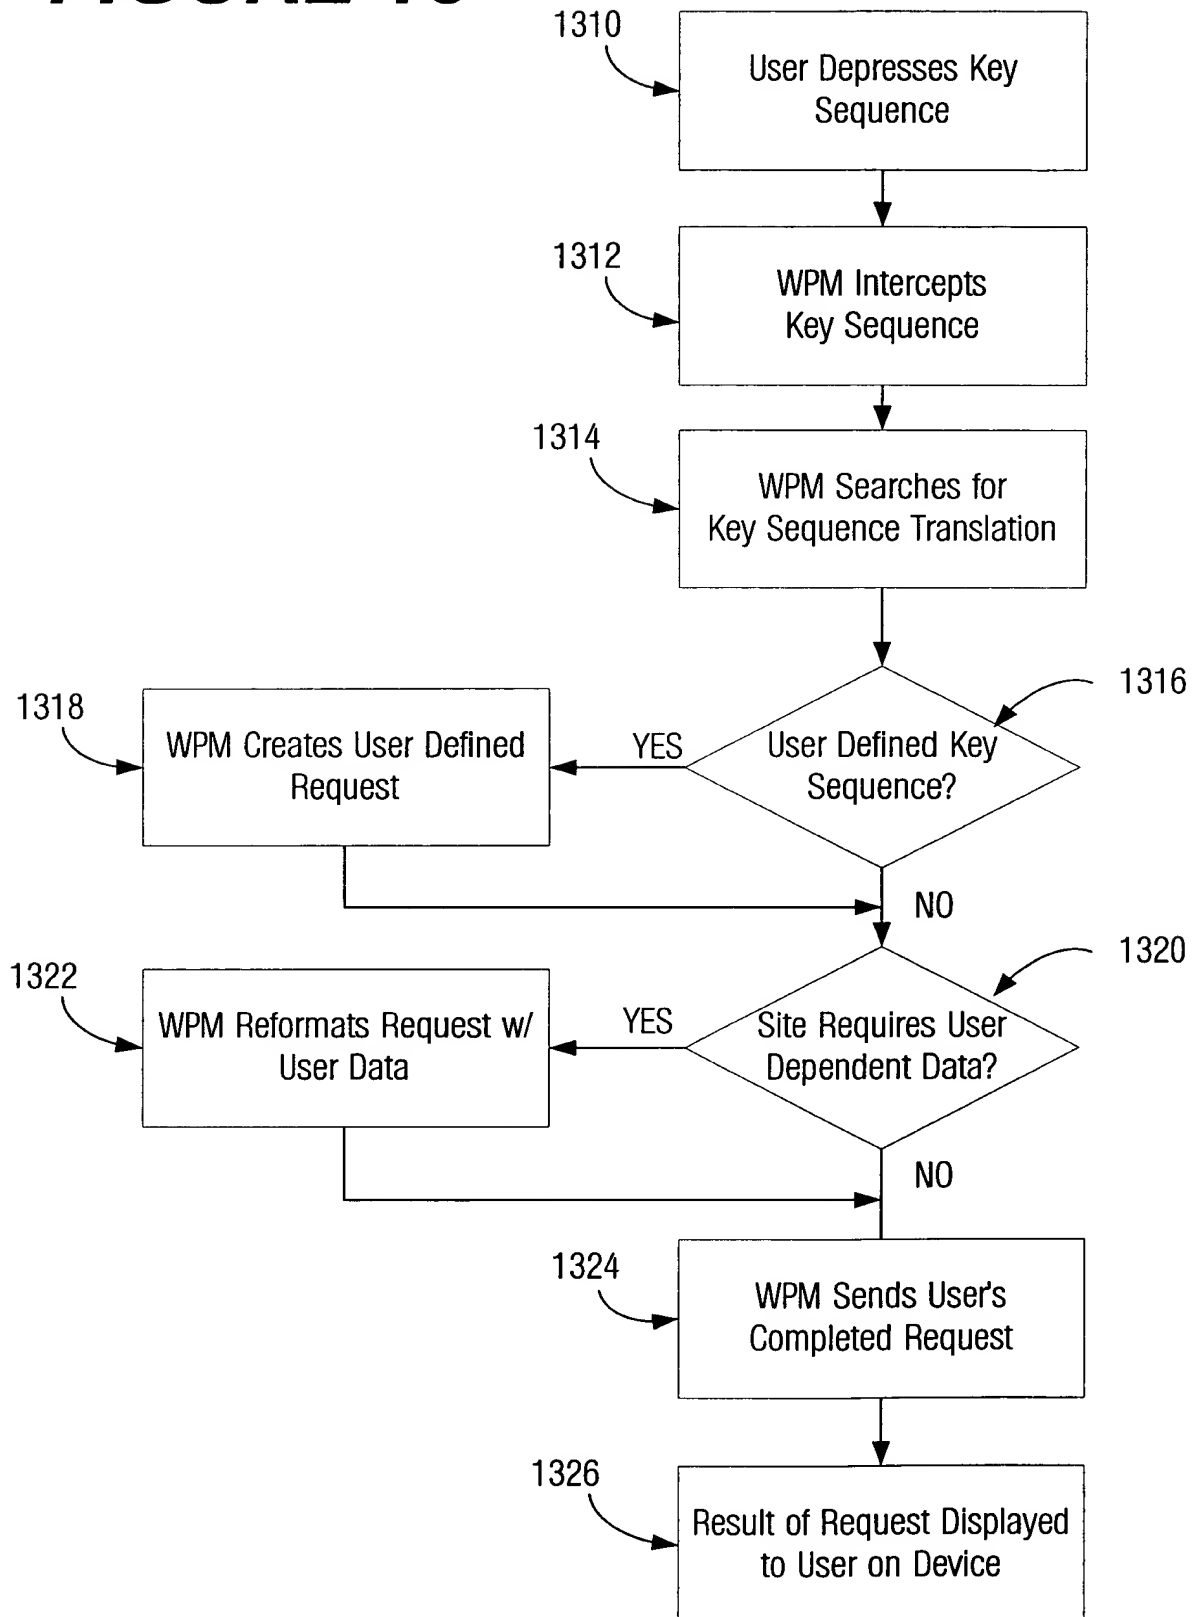


FIGURE 14

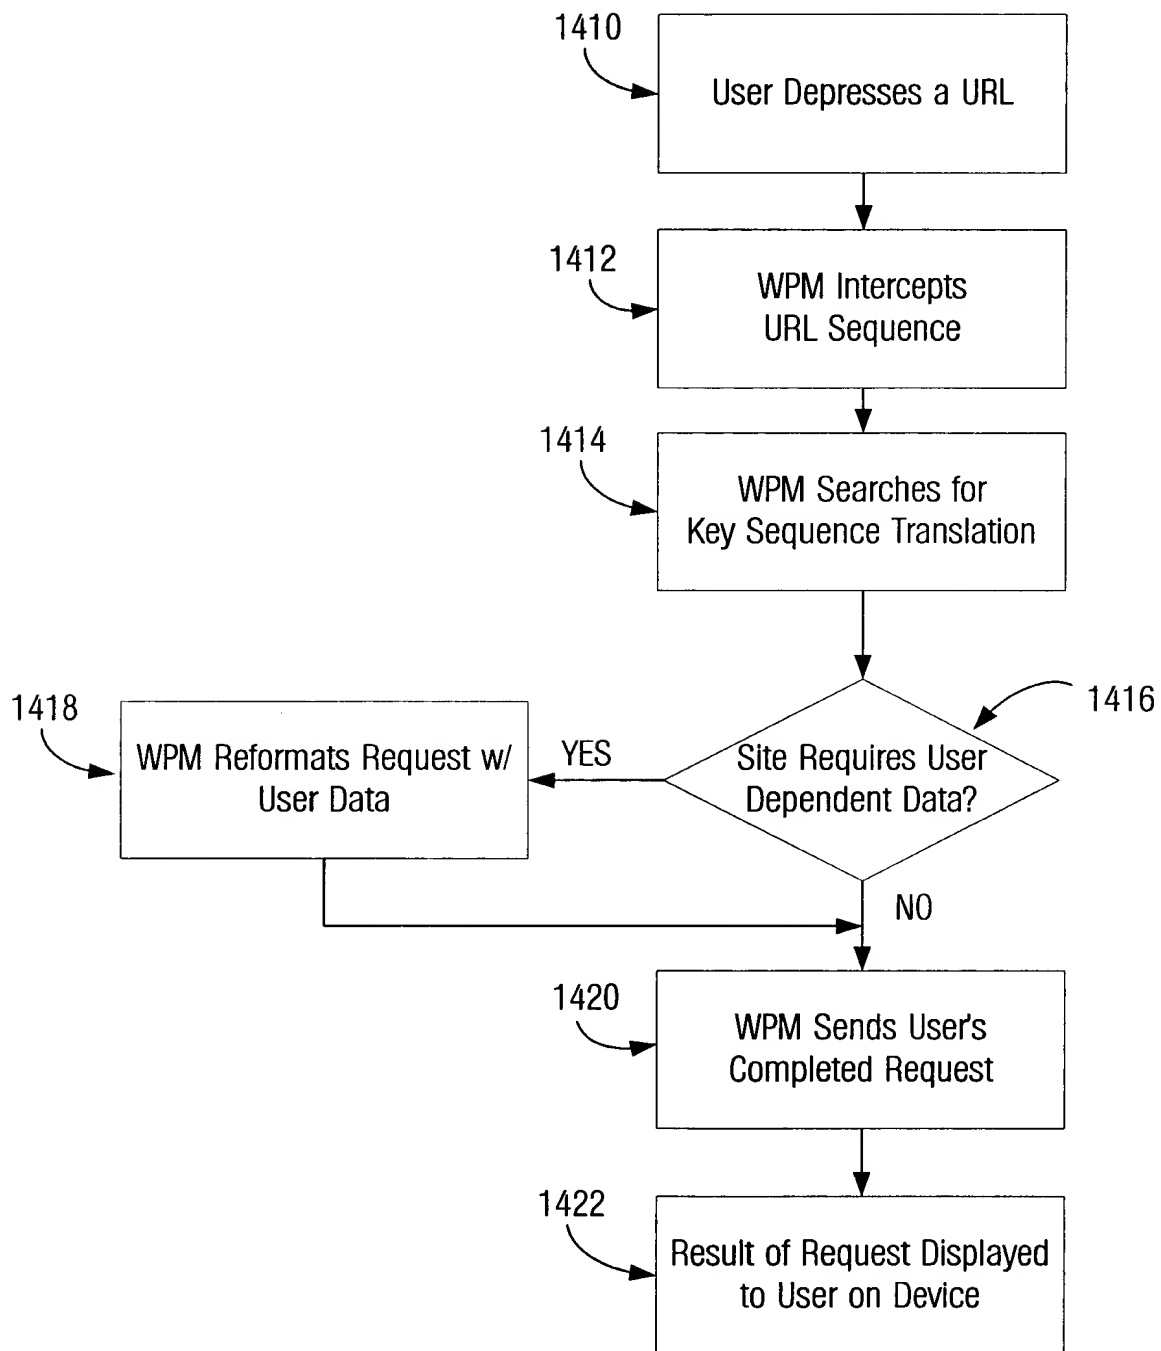


FIGURE 15

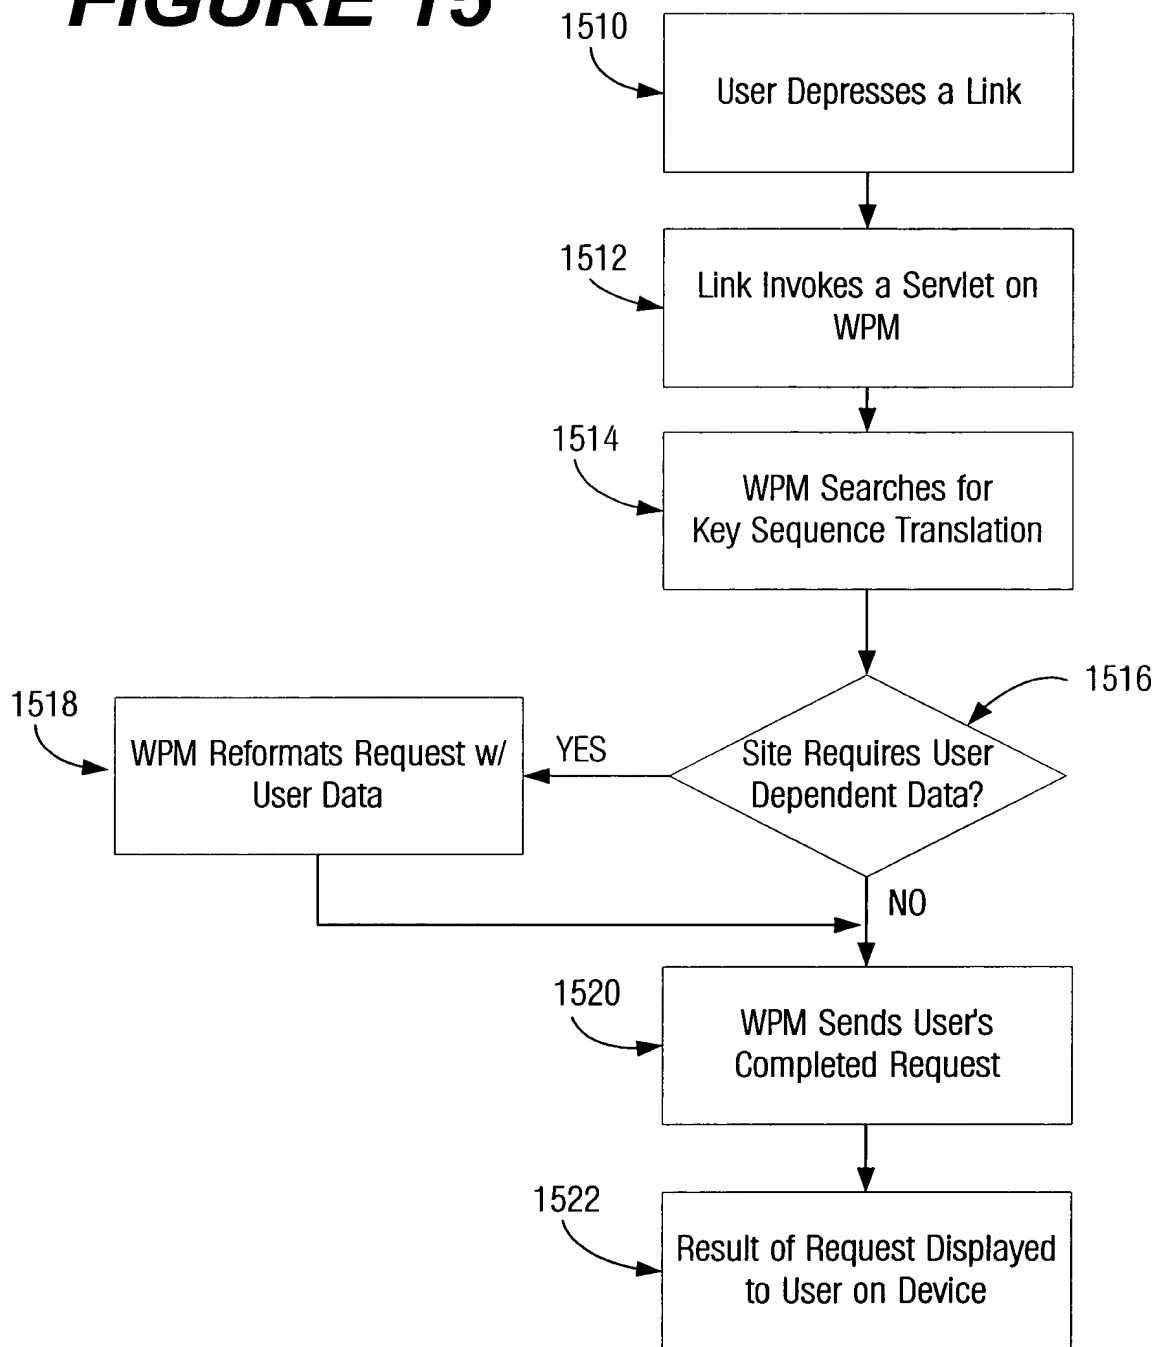


FIGURE 16A

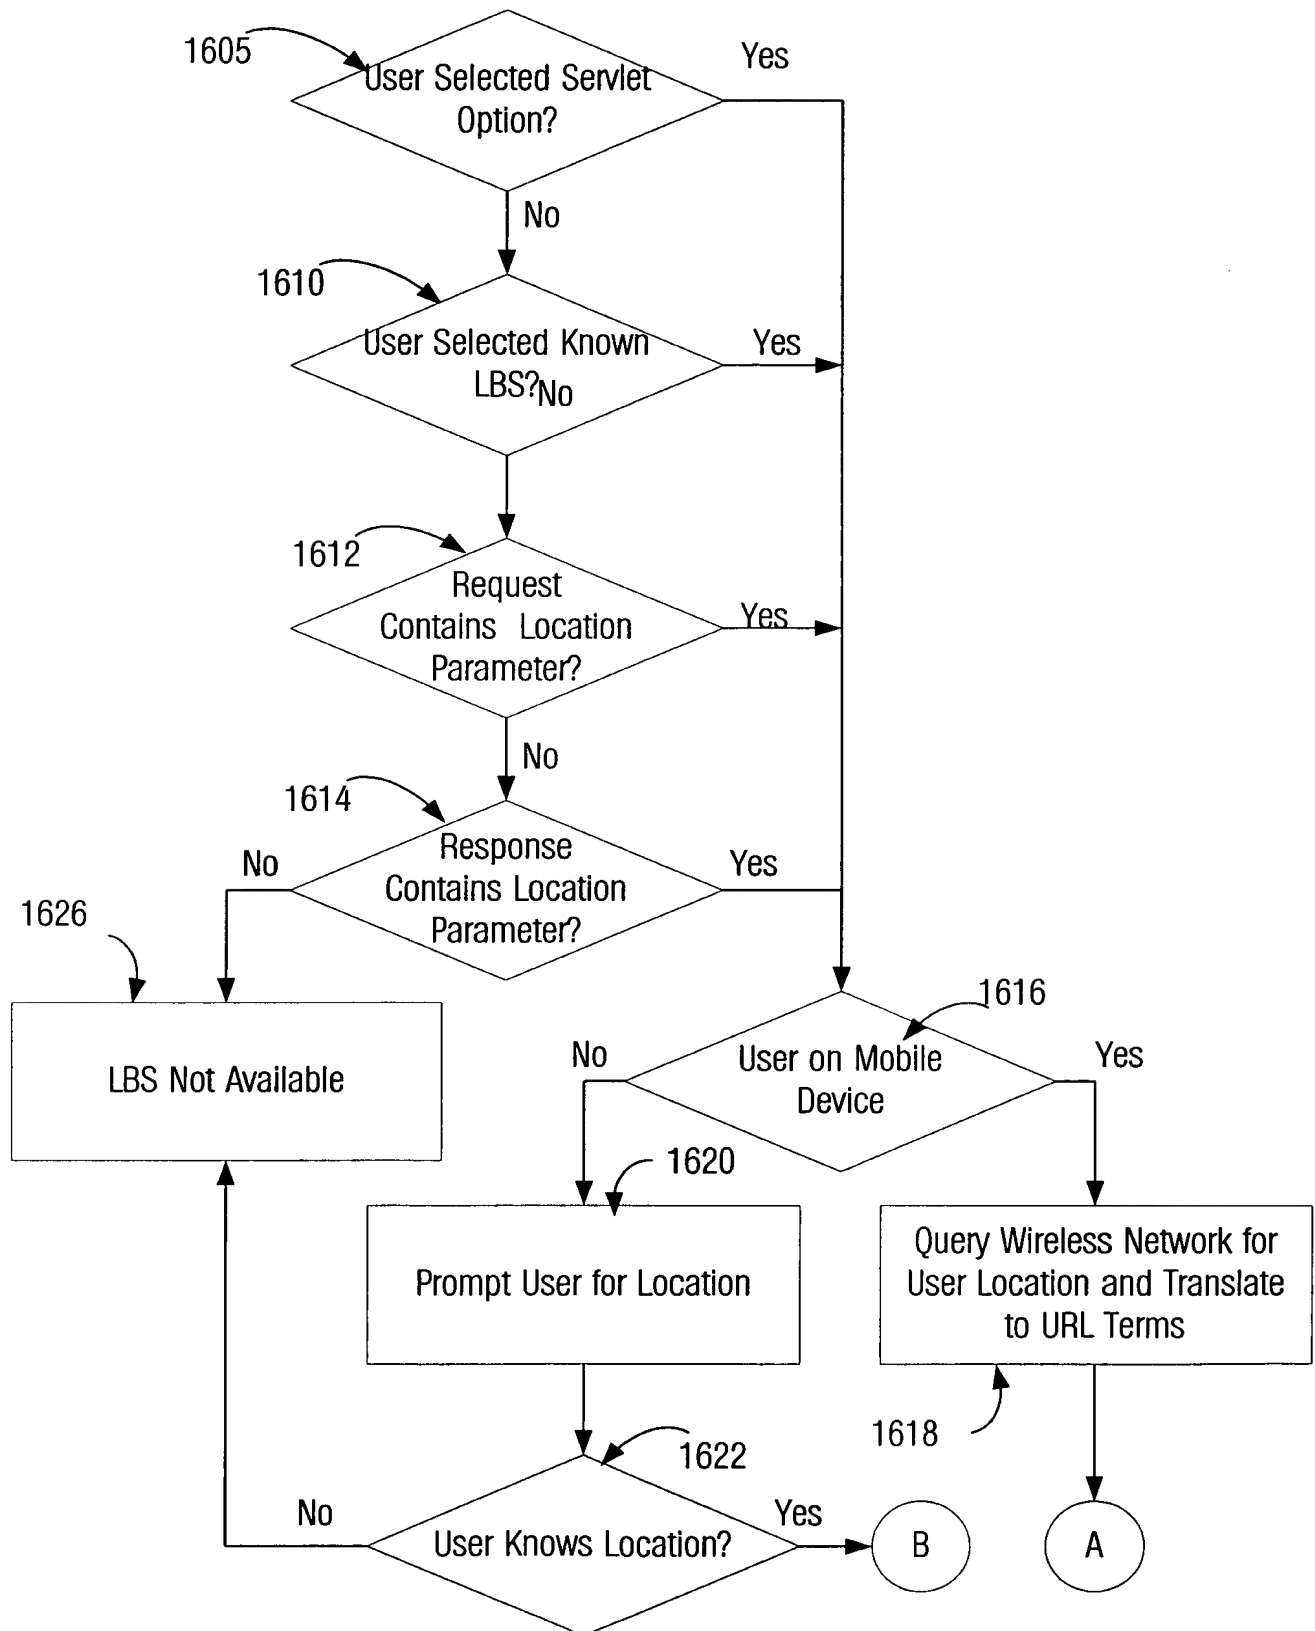


FIGURE 16B

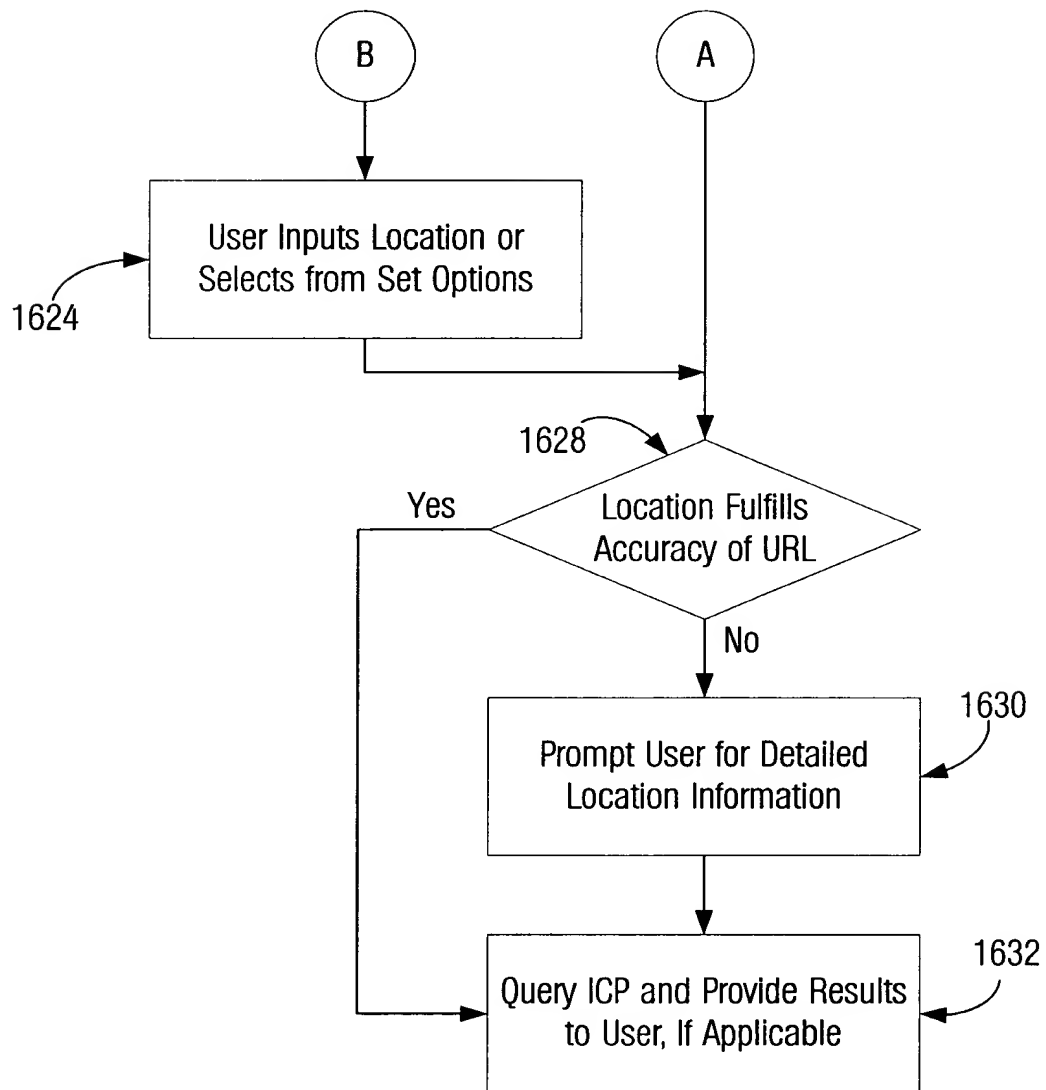


FIGURE 17

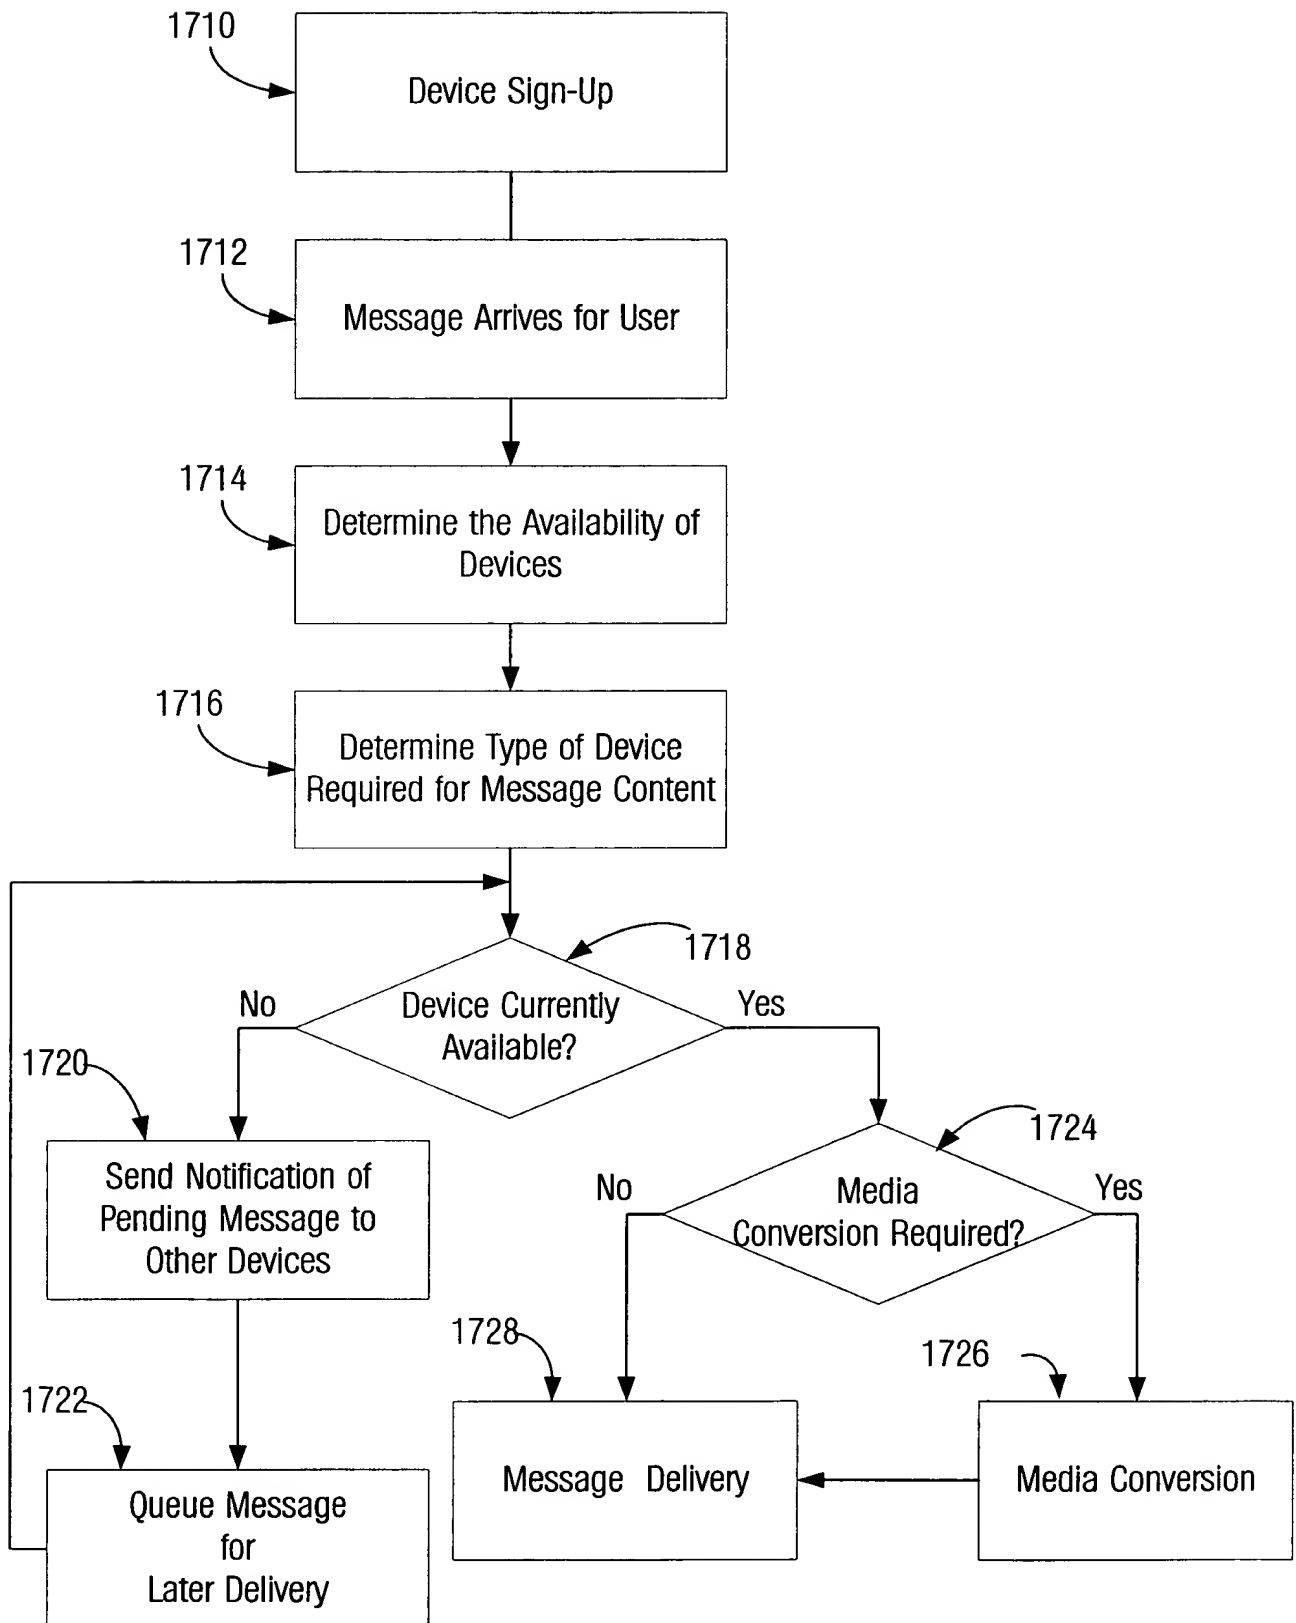


FIGURE 18

	Desktop Computer	PSTN Phone	Laptop Computer	PDA	Cellular (Browser)	Cellular (Voice)
1810	Permanent	1	1	1	1	1
1812	Temporary	2	2	2	2	2
1814	Automatic	0	3	3	0	0
1816	Manual	6	7	7	7	6
1818	Internal	7	6	6	6	7
1820	External	0	5	5	0	0
1822	Query	0	4	4	4	4
1824	User Over-ride					

FIGURE 19

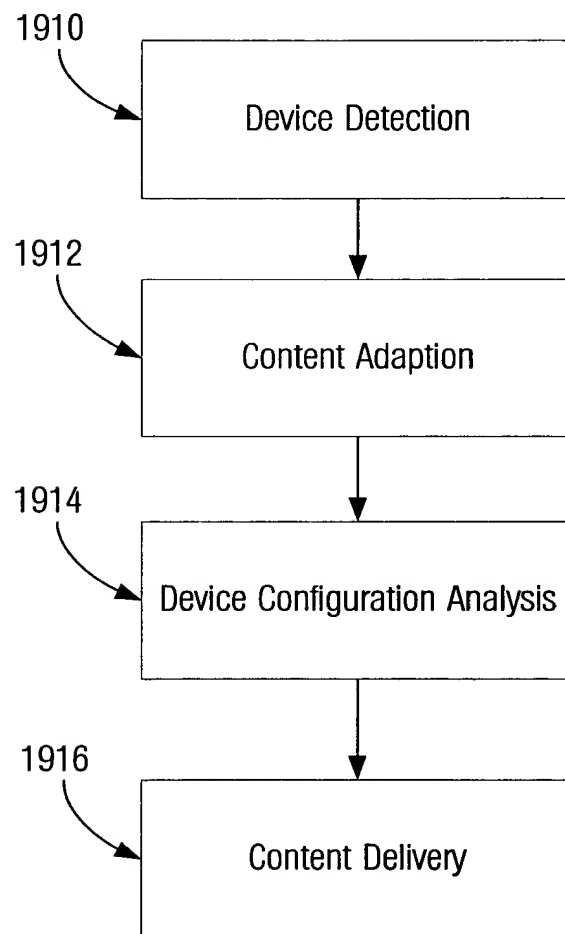


FIGURE 20

